

Microlance

insertion moisture meter

PROMAT
www.promat.hk

innovators in fluid measurement


Hydramotion

- ▶ instantaneous moisture and temperature
- ▶ robust practical design
- ▶ simple operation
- ▶ accurate on-site readings
- ▶ spot sample or heap average measurement



SPECIFICATION

Measurement response	2 seconds
Moisture range	0-25%
Mositure resolution	±0.1%
Moisture accuracy	±0.5% of reading
Temperature range	-20°C to 60°C
Temperature resolution	0.1°C
Temperature accuracy	<0.5°C
Weight	1500g
Material selections	6 (user configurable)
Power requirements	4 x 1.5v AA alkaline cells (or equivalent)
Shaft colour options	Grey / Orange / Yellow / Blue

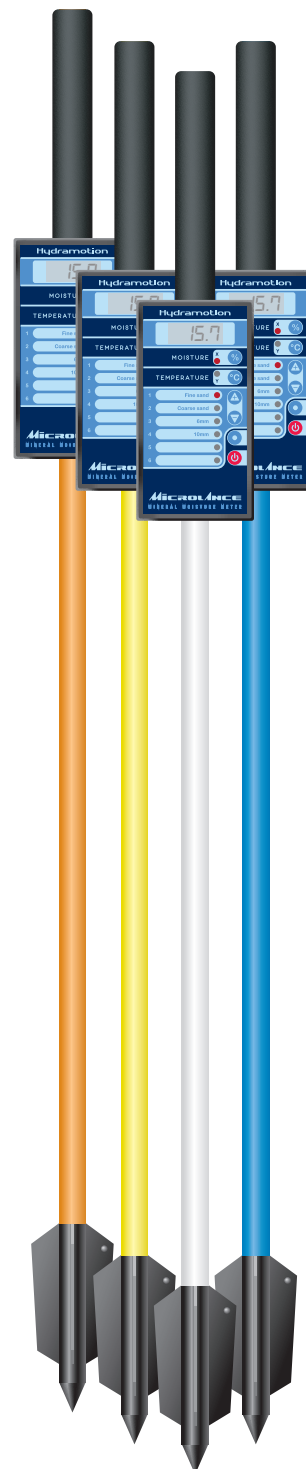

PROMAT
www.promat.hk



PROMAT (HK) Limited 寶時 (香港) 有限公司
☎: 2661 2392 ☎: 5196 8860 ✉: info@promat.hk 🌐: http://www.promat.hk