

MEASURING TOOLS CO.,LTD.

Water Level Measure

FOR WATER LEVEL MEASUREMENT CAN BE MEASURED WITHOUT EARTHED LINE CONSIDERABLE TIME SAVINGS WHEN MEASURING WATER LEVEL.



MILLION ROPE WATER LEVEL MEASURE PVC coated fiberglass tape in ABS Case.

Narrow and thick material of tape is head to stick inside the pipe. Probe has only 12mm of diameter so very suitable for the thin pipe. #width:6.20m #Thick:1.9mm

#Weight:2kgs.(RWL50M), 3.1kgs.(RWL100M),730g(RWL10M)

Cat. Nos.	Lengths
RWL10M	10m
RWL50M	50m
RWL100M	100m

*spec

#Tape Material:PVC coated fiberglass(Copper Wire at the tape edges)

#Case:ABS

#Probe:Stainless

#Power source:UM-3x2 #Voltage:3V

#Battery life:approx in 24 hours consecutive use.



Water Level Measure

*Accessories:

battery(UM-3)x2

Taper strap(Standard)


Special Belt on your back(Option)

@You can use optionally supplied belts on your back for easy moving.

#Million rope water level measure



Probe:Stainless 12mm of diameter Graduation:1cm throughout on one side

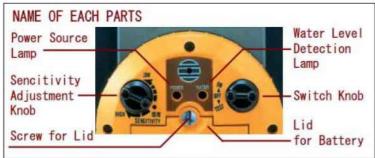

CAUTION!

- · Do not use against petroleum and any inflammable liquid.
- Wire inside the tape might be cut by violent use. Especially, be careful to handle near the probe.
- · It's not suitable for any inflammable or non-conductive liquid.
- · Use alcoholics is prohibited to avoid for use against liquid containing alkali, surface active agent and salt.
- Shocking or sinking the body is prohibited.
- · Leaving under high temperature exposing to the direct rays of the sun for a long time is prohibited.
- Remove the batteries when you do not use for a long time.
- · Disassembly of handle or case is prohibited.

Promat (HK) Ltd

901 New Trend Centre, 704 Prince Edward Road East, Sanpokong, Kowloon, HK

Tel.: (852) 2661 2392 Fax: (852) 2661 2086 E-mail: sales@promat.hk Website: http://www.promat.hk





